

# Proposition of Minimum Eigenvalue Algorithm in Cognitive Radio Technology

Amir Eslami, Gunes Karabulut Kurt  
Istanbul Technical University  
Istanbul, Turkey  
{eslami15, gkurt}@itu.edu.tr



**ABSTRACT:** In the cognitive radio technology, the non-reliance property to signal and noise power is deployed. In this work we propose a one to minimum eigenvalue spectrum algorithm with the help of the Tracy-Widom distribution. This proposed method has not followed the noise power. Limiting distribution approach to minimum eigenvalue causes the detection algorithm to perform much better in lower SNR ranges. It has been shown that this system outperforms better not only in low SNR range but also in low smoothing factors when compared to well-known maximum to minimum eigenvalue method. Finally, we have assessed the performance improvement and compared with other well-known algorithms in a wide SNR range and different smoothing factors which proves the efficiency.

**Keywords:** Spectrum Sensing, Cognitive Radio Technology, Maximum to Minimum Eigenvalue Method, Energy Detection, Energy and One to Minimum Eigenvalue Method

**Received:** 14 September 2020, Revised 23 November 2020, Accepted 5 December 2020

**DOI:** 10.6025/jitr/2021/12/1/1-7

**Copyright:** With authors

## 1. Introduction

IEEE 802.22 wireless regional area networks are designed to operate over the vacant TV band for broadband access to Wi-Fi devices by using cognitive radio (CR) technology. One the key factors in CR technology is spectrum sensing and reliably detecting the status of the spectrum band being sensed. Researchers have been trying to find new sensing algorithms or to determine ways to increase the performance and reliability of existing methods. There are a wide array of sensing algorithms in the literature including energy detection (ED) [3], [5], matched filter, wavelet based spectrum sensing, cyclostationary based and covariance based detection methods [2]. Each method has its own requirements for the detection process, for instance, the cyclic frequency of primary user is needed for cyclostationary method, waveform information is needed for matched filter method and the noise variance is needed for ED method where the noise uncertainty effects its performance significantly [1]. In this paper by using a limiting approach to the minimum eigenvalue of covariance matrix, we introduce a new method of energy and one to minimum eigenvalue (EOME), inheriting both energy detection and one to minimum eigenvalue effects at once without reliance to any information about the primary user's signal or the noise power. Tracy-Widom distribution of minimum eigenvalue gives EOME a much higher performance in low SNR ranges. There is a method in literature named energy to minimum eigenvalue method (EME) with decision fraction, similar to our proposed method that uses

asymptotic approach to the minimum eigenvalue [2], [4], and [9]. EME method has discussed in Section III and it has a much lower performance compared to EOME and maximum to minimum eigenvalue (MME) methods as shown in literature [2], [9] and Section 4 of this letter. Rest of the letter is organized as follows. In Section 2, system background of cognitive radio systems and in Section 3, a brief overview of MME and EME methods are provided. In Section 4, the EOME method is introduced. In Section 5, numerical and simulation results are given followed by concluding remarks in Section 6.

## 2. System Background

Assuming that we are interested in sensing a frequency band with central frequency of  $f_c$  and  $W$  bandwidth, received signals are effected by noise, small and large scale fading effects [2] which can be modeled by different distributions in literature. We assume that additive white Gaussian noise (AWGN) shown as  $\eta_c(t)$  in this paper, is stationary process satisfying  $E[\eta_c(t)] = 0$  and  $E[\eta_c(t), \eta_c(t+\tau)] = 0$  for any  $\tau \neq 0$  with variance  $\sigma_n^2$ . The procedure of detection in cognitive radio systems is a binary hypothesis process. In the case that the channel is being used by primary user, H1 hypothesis is selected whenever the channel is in idle status, hypothesis H0 is selected. These two hypotheses for discrete signals which are being sampled with the rate of  $f_s$ , compatible with the Nyquist sampling theorem can be shown as follows[2]:

$$\begin{aligned} H_0: Y(n) &= \eta(n), \\ H_1: Y(n) &= h(n) X(n) + \eta(n), \end{aligned} \quad (1)$$

where  $Y(n)$  is the signal received by detector,  $X(n)$  is the signal used by primary user and  $h(n)$  is the channel response from source signal to detector. Smoothing factor is used to make time diversity in covariance based spectrum sensing methods by using consecutive signal samples in detection process. Smoothing factor is shown as  $L$  in this paper and its effect on received signal samples shown below [2]:

$$\hat{Y}(n) = [Y(n), Y(n-1), \dots, Y(n-L+1)]^T \quad (2)$$

In case of hypothesis H0, where there is no signal sent over the frequency band, the received signal samples with  $L$  smoothing factor can be modeled as follows:

$$\hat{\eta}(n) = [\eta(n), \eta(n-1), \dots, \eta(n-L+1)]^T \quad (3)$$

Statistical covariance matrices of any matrix like  $\hat{Y}(n)$  can be defined as:

$$R_{\hat{Y}}(n) = E[\hat{Y}(n)\hat{Y}^T(n)] \quad (4)$$

## 3. Brief Overview of MME and EME Methods

Maximum to minimum eigenvalue is based on the ratio of the maximum eigenvalue to the minimum eigenvalue of the covariance matrix of the received signal. This ratio is then compared to a pre-calculated threshold. If the fraction is larger than the threshold, busy status is concluded and idle is decided otherwise [4]. When the channel is in idle status and no primary user is using the sensed spectrum band,  $\hat{Y}(n)$  is equal to covariance matrix of the noise matrix [10].

$$R_{\hat{\eta}}(N) = \frac{1}{N} \sum_{n=L-1}^{L-2+N} \hat{\eta}(n)\hat{\eta}^T(n). \quad (5)$$

It is shown in the literature that  $\frac{e_{max}(Z(N)) - \beta}{\Omega}$  converges to Tracy-Widom distribution of order 1 if noise is real and order 2 if noise is complex.  $e_{max}$  is the maximum eigenvalue,  $Z(N)$ ,  $\beta$  and  $\Omega$  are defined as follows:

$$Z(N) = \frac{N}{\sigma_n^2} R_{\hat{\eta}}(N), \quad (6)$$

$$\beta = (\sqrt{N-1} + \sqrt{L})^2 \quad (7)$$

$$\Omega = (\sqrt{N-1} + \sqrt{L}) \times \left( \frac{1}{\sqrt{N-1}} + \frac{1}{\sqrt{L}} \right)^{\frac{1}{3}}. \quad (8)$$

Considering  $N$  large enough, asymptotic approach in the literature shows that the minimum eigenvalue of  $R_n(N)$  is equal to  $\sigma_n^2(\sqrt{N} - \sqrt{L})^2$ . Using the asymptotic value of minimum eigenvalue shown as  $e_{min}$  and Tracy-Widom distribution of  $e_{max}$ , probability of false alarm in MME detection method can be written as follows [2], [10].

$$P_{fa} = P\left(\frac{e_{max}}{e_{min}} > \delta \mid H_0\right) = 1 - F_1\left(\frac{\delta(\sqrt{N} - \sqrt{L})^2 - \beta}{\nu}\right), \quad (9)$$

where

$$\delta = \left( \sqrt{\frac{2}{N}} Q^{-1}(P_{fa} + 1) \right) \times \left( \frac{N}{(\sqrt{N} - \sqrt{L})^2} \right). \quad (10)$$

Energy to minimum eigenvalue (EME) method is based on the fraction of average energy to asymptotic value of minimum eigenvalue. If the fraction is greater than a pre-defined threshold, method decides busy and idle status is decided otherwise. The probability of false alarm in this case is obtained as:

$$\begin{aligned} P_{fa} &= P\left(\frac{E(t)}{e_{min}} > \kappa \mid H_0\right) \\ &= P(E(t) > \kappa \frac{\sigma_n^2}{N} (\sqrt{N} - \sqrt{L})^2 \mid H_0) \\ &\approx Q\left(\frac{\kappa(\sqrt{N} - \sqrt{L})^2 - N}{\sqrt{2N}}\right). \end{aligned} \quad (11)$$

The expression of  $\kappa$  can be calculated using (11) as:

$$\kappa = \frac{Q^{-1}(P_{fa})\sqrt{2N} + N}{(\sqrt{N} - \sqrt{L})^2}.$$

#### 4. Energy and One to Minimum Eigenvalue Spectrum Sensing Method

It is shown in the literature that minimum eigenvalue can be modeled with a Tracy-Widom distribution. By considering number of samples,  $N$ , large enough,  $\frac{e_{max}}{e_{min}}$  converges to Tracy-Widom of order 1 if noise is real and order 2 if noise is complex [6], [8].  $e_{min}$  is minimum eigenvalue,  $Z(N)$  is the same as equations 6.  $\Psi$  and  $\nu$  are defined as:

$$\Psi = (\sqrt{N} - \sqrt{L})^2, \quad (13)$$

$$\nu = (\sqrt{L} - \sqrt{N}) \times \left( \frac{1}{\sqrt{L}} - \frac{1}{\sqrt{N}} \right)^{\frac{1}{3}}. \quad (14)$$

Then, the probability of false alarm of one to minimum eigenvalue (OME) can be defined as:

$$P_{fa} = P\left(\frac{1}{e_{min}} > \theta \mid H_0\right) = P(1 > \theta e_{min} \mid H_0). \quad (15)$$

By using limiting the distribution of minimum eigenvalue theorem and assuming noise as real, (15) can be written as:

$$\begin{aligned}
 P_{fa} &= P\left(1 > \theta \frac{\sigma_\eta^2}{N} Z(N)\right) = P\left(\frac{N}{\theta \sigma_\eta^2} > Z(N)\right) \\
 &= P\left(\frac{(N/\theta \sigma_\eta^2) - \psi}{\nu} > \frac{Z(N) - \psi}{\nu}\right) \\
 &= F_1\left(\frac{(N/\theta \sigma_\eta^2) - \psi}{\nu}\right).
 \end{aligned} \tag{16}$$

In the case of complex noise, the order of Tracy-Widom distribution in the (16) is 2. From equation (18), it is obvious that threshold of OME relies on noise power. Probability of the normalized energy of received signals,  $E(N)$ , be bigger than a threshold named  $\phi$  under hypothesis  $H_0$  can be shown as [1], [3]:

Assuming signal samples large enough and using central limit theorem, probability density function of  $E(N)$  under hypothesis  $H_0$ , becomes a normal distribution with mean equal to  $\frac{\phi - \sigma_\eta^2}{\sqrt{2\sigma_\eta^4/N}}$  and variance equal to  $\frac{\sigma_\eta^2}{\sqrt{2\sigma_\eta^4/N}}$ . So, probability of false alarm can be calculated as follows:

$$\begin{aligned}
 P_{fa} &= P\left(\frac{E(N) - \sigma_\eta^2}{\sqrt{2\sigma_\eta^4/N}} > \frac{\phi - \sigma_\eta^2}{\sqrt{2\sigma_\eta^4/N}} \mid H_0\right) \\
 &= Q\left(\frac{\phi - \sigma_\eta^2}{\sqrt{2\sigma_\eta^4/N}}\right),
 \end{aligned} \tag{17}$$

where,  $\phi$  can be calculated as [3]:

$$\phi = \sigma_\eta^2 \left(1 + \frac{\sqrt{2}Q^{-1}(P_{fa})}{\sqrt{N}}\right). \tag{18}$$

Considering that the values of normalized energy,  $\phi$  and one to minimum eigenvalue are always positive, and combining equations (15) and (19), we can obtain

$$\begin{aligned}
 P_{fa} &= P\left(\frac{1}{e_{\min}} \times E(N) > \theta \times \phi \mid H_0\right) \\
 &= P\left(\frac{E(N)}{e_{\min}} > \lambda \mid H_0\right),
 \end{aligned} \tag{19}$$

Where  $\lambda$  can be calculated as:

$$\lambda = \theta \times \phi = \frac{N}{(\nu F_1^{-1}(P_{fa}) + \psi)} \times \left(1 + \frac{\sqrt{2}Q^{-1}(P_{fa})}{\sqrt{N}}\right). \tag{20}$$

By simplifying  $\lambda$ , threshold of EOME method can be evaluated as:

$$\lambda = \frac{N + \sqrt{2N}Q^{-1}(P_{fa})}{(\nu F_1^{-1}(P_{fa}) + \psi)}. \quad (21)$$

EOME sensing method is given in algorithm 1. The complexity of covariance based spectrum methods stem from the computational of covariance matrix,  $\hat{\mathbf{R}}_L$ ; and eigenvalue decomposition of the covariance matrix. For covariance matrix computations,  $LN$  multiplications and  $L(N-1)$  additions are needed [2]. For eigenvalue decomposition, fast SVD symmetric algorithm [7] can be used with  $O(N^2 \log L)$  multiplications and additions which makes the total computational complexity equal to  $LN + O(L^2 \log L)$ .

## 5. Numerical Results and Discussion

The performance of proposed spectrum sensing algorithm is evaluated with the help of numerical results obtained using MATLAB software simulations and compared with very well-known methods. All simulations are using modulated random primary user signals and i.i.d. Gaussian distributed noise samples are used. It is assumed that channel is slow fading and doesn't change during the sampling period.  $P_{fa}$  is chosen as 0.1, 103 signal samples are used and the stopping criterion is set at 104 iterations.

First we have plotted the probability of detection of EOME method vs. SNR passing through Gaussian channel in figure 1 compared with EME and MME methods with smoothing factors of 4 and 16 and ED method without and with noise uncertainty 0.5dB. ED has a good performance but highly reliable to accuracy of noise power measurement in a way that with an only 0.5dB uncertainty in noise power estimation, performance of ED decrease in a high range that makes this method unusable in practice.

### Algorithm 1.

---

Energy and one to minimum eigenvalue spectrum sensing method.

---

**Input:**  $\lambda$ ,  $P_{fa}$ ,  $L$

**Output:**  $D_i$  1:

$X_n$  = received signal samples,  $n = 1, 2, 3, \dots, N/2$ :

Create  $\hat{\mathbf{R}}_L$  matrix using  $L$  consecutive samples 3:

Calculate the eigenvalues of covariance matrix  $\hat{\mathbf{R}}_L$  4:

Calculate normalized energy of received signals,  $E(N)$  5:

Find the minimum eigenvalue,  $e_{min}$  6:

$\zeta = \hat{\mathbf{R}}_L$  7:

if  $\zeta$

---

EME has a much lower performance compared to other mentioned blind methods such as MME and EOME because of using asymptotic value of minimum eigenvalue in EME threshold measurement. In smoothing factor of 4, EOME method performs better compared to MME in all SNR ranges. Higher smoothing factors increase the performance of covariance based spectrum sensing methods with the cost of higher computational complexity as shown in section 4. In high smoothing factors, MME has a better performance in SNRs higher than -11dB but in lower SNRs, EOME performs so much better than MME method passing through Gaussian channel.

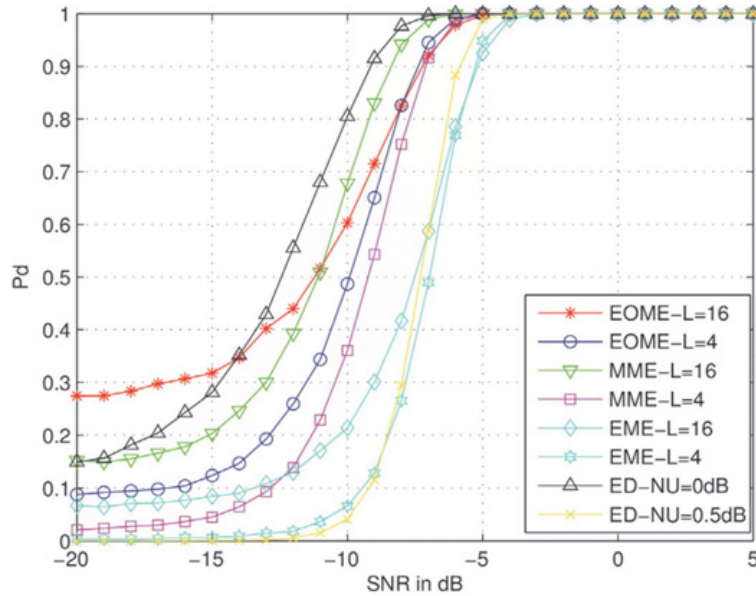


Figure 1. Simulation results for EOME, EME, MME, all with  $L = 4$  and  $16$  and ED with  $0$  and  $0.5$ dB noise uncertainty sensing methods

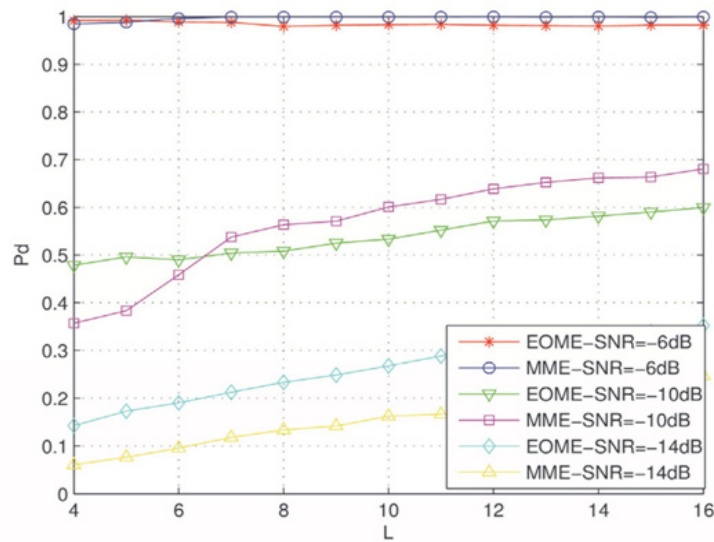


Figure 2. Simulation results for EOME and MME sensing methods with different smoothing factors in SNRs equal to  $-6$ dB,  $-10$ dB and  $-14$ dB

Figure 2 shows the effect of smoothing factors between  $4$  and  $16$  on MME and EOME in different SNRs equal to  $-6$ dB,  $-10$  dB and  $-14$ dB passing through Gaussian channel. In high SNR ranges, as mentioned earlier, both MME and EOME methods performs good in all smoothing factors. In  $-10$ dB for example, both methods performs almost like each other. In low SNRs such as  $-14$ dB, EOME performs much higher than MME method in the specified smoothing factors but in SNRs near to  $-10$ dB, performance of EOME is better in smoothing factors lower than  $5$ .

## 6. Conclusion

We introduced EOME, a blind sensing algorithm performance of doesn't rely on any information about primary signal or noise

power, by jointly using TracyWidom distribution of minimum eigenvalue and energy detection effects at once. Limiting distribution approach to minimum eigenvalue has made EOME perform better when compared to MME and EME methods in low SNR ranges. For devices with processing shortage, EOME performs better with low smoothing factors causing reduced computational complexity which helps making its implementation possible in practice. We also suggested to use fast SVD symmetric algorithm to have a faster process compared to classical methods. This paper provides findings to detail the effects of using limiting distribution of minimum eigenvalue combined with energy detection in covariance based spectrum sensing approaches, addressing a guideline towards optimal solutions to fulfill fundamental sensing requirements of IEEE802.22 WRAN.

## References

- [1] Eslami, A., Karamzadeh, S. (2016). Proposal and Analysis of a New Spectrum Sensing Algorithm for Cognitive Radio Driven Hospitals, *International Journal of Applied Mathematics, Electronics and Computers*, 4, p 48-51, 2016.
- [2] Zeng, Y. H., Liang, Y. C. (2009). Eigenvalue-based Spectrum Sensing Algorithms for Cognitive Radio, *IEEE Transactions on Communications*, vol. 57, p 1784-1793, 2009.
- [3] Ye, Z., Memik, G., Grosspietsch, J. (2008). Energy Detection using Estimated Noise Variance for Spectrum Sensing in Cognitive Radio Networks, *Wireless Communications and Networking Conference 2008*.
- [4] Pillay, N., Xu, H. J. (2012). Blind Eigenvalue-based Spectrum Sensing for Cognitive Radio Networks, *IET Communications*, 6 (11), p 1388-1396, July 2012.
- [5] Lopez-Benitez, M., Casadevall, F. (2012). Improved Energy Detection Spectrum Sensing for Cognitive Radio, *IET Commun.*, 6 (8), p 785-796, May 2012.
- [6] Feldheim, O. N., Sodin. S. (2010). A Universality Result for the Smallest Eigenvalues of Certain Sample Covariance Matrices, *Geometric and Functional Analysis*, 20 (1), p 88-123, 2010.
- [7] Xu, W., Sanzheng, Q. (2008). A Fast Symmetric SVD Algorithm for Square Hankel Matrices, *Linear Algebra and its Applications*, 428 (2-3), p 550-563, 2008.
- [8] Penna, F., Garelo, R., Spirito, M. (2009). Cooperative Spectrum Sensing Based on the Limiting Eigenvalue Ratio Distribution in Wishart Matrices, *IEEE Commun. Lett.*, 13 (7), p 507- 509, July 2009.
- [9] Eslami, A., Karamzadeh, S. (2016). Double Threshold Maximum to Minimum Eigen-value Spectrum Sensing Proposal and Performance Analysis, *2016 National Conference on Electrical, Electronics and Biomedical Engineering (ELECO)*, p 646-649, 2016.
- [10] Wael, C.B.A., Armi, N., Rohman, B.P. (2016). Spectrum Sensing for low SNR Environment using Maximum-Minimum Eigenvalue (MME) Detection, *2016 International Seminar on Intelligent Technology and Its Applications (ISITIA)*, p 435-438, 2016.